


Post Bottomer Pneumatic A and C

The BeA pneumatic post bottom closers A and C incorporate a simple rugged welded frame design for long service life. Pneumatically driven clinching provides effortless operation for higher volume applications. These bottomers will clinch 5/8", 3/4", and 7/8" leg length carton staples with no adjustment required. The 12" throat depth and 37" post height allows these bottomers to staple a wide range of box sizes. Head return speed is set with an adjustable flow control valve.

Popular Applications

Closing of corrugated boxes

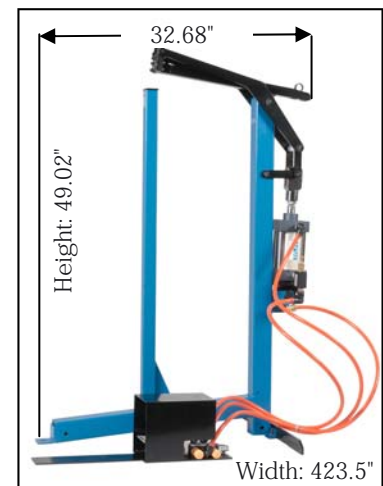

Technical Data

Model:	Pneum. Post Bottomer A Standard	Pneum. Post Bottomer C Standard
Part number:		
Loading type:	rear loading	rear loading
Fastener type:	1 3/8" x 5/8, 3/4", and 7/8"	1 1/4" x 3/4", 5/8" and 7/8"
Magazine capacity:	200	200
Standard load, strips x fasteners/strip:	4 x 50	4 x 50
Working pressure:	70-85 P.S.I.	70-85 P.S.I.
Maximum air pressure:	100 P.S.I.	100 P.S.I.
Air consumption:	approx. .1 cu. ft. @ 80 P.S.I.	approx. .1 cu. ft. @ 80 P.S.I.
Recommended hose I.D.:	3/8"Ø	3/8"Ø
Weight:	50.04 lbs.	50.04 lbs.

Items supplied with tool: Operating instructions, spare parts list, service instructions.

Also available: Side arm version for tray assembly

Subject to technical modifications.




This tool conforms to the EC Directive for Machinery (89/392 EWG)

Post Bottomer Pneumatic A and C



BeA Fasteners U.S.A.
2100-120 Fairfax Road
Greensboro, NC 27407
Phone: (336) 510-4232
Fax: (336) 510-4233

Fastener type A-Series, and C-Series

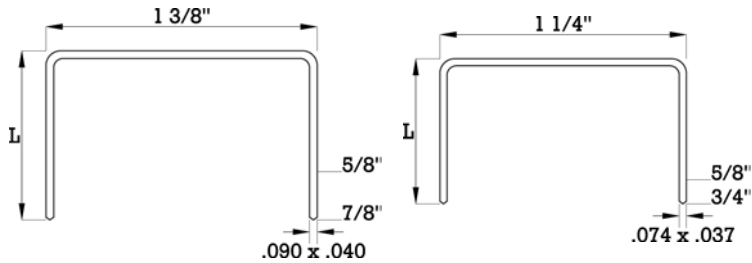

Part number	Description	L = Length
10000778	347/15 (A5/8)	5/8"
10000779	347/18 (A3/4)	3/4"
10002765	347/22 (A7/8)	7/8"
10000775	32/15 (C5/8)	5/8"
10000776	32/18 (C3/4)	3/4"

Other lengths and finishes are also available on request.