

Pneumatic Plier Type 110/16-414 L

The light and fast plier takes staples type 110 in the lengths from 8 – 16 mm. The 39 mm high jaw throat guarantees secure of a variety of material. Due to the long magazine with large capacity the plier is well suited for industrial use. The tool is also available for staples type 95 and type 380.



Popular applications:

Chlinchig of: paper, cardboard, foil, leather, bag headers, poster coverings etc.

Length:	366 mm
Width:	66 mm
Height:	284 mm

Technical Data

Type description:	110/16-414 L Long Magazine
Article code:	12000447
Magazine type :	Bottom Loader
Safety:	-
Fastener type:	Type 110
Magazine capacity:	184
Fasteners per strip:	2 x 70
Operating pressure:	5 – 6 bar
Max. operating pressure:	6 bar
Air consumption/operation:	0.7 litre / 6 bar
Inner hose diameter:	Ø 9 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d= 86 dB
Single-shot emission sound pressure level:	L WA, 1 s,d= 92 dB
Weight:	1.65 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is under the declaration limit as per EN 292-1, amendment A.

Extras supplied with the stapler:

Operating instructions, spare parts list, service instructions, silencer.

Subject to technical modifications

All BeA pneumatic tools can be jig-mounted
We supply the necessary accessories and equipments.



This tool conforms to the EG Directive
for Machinery (89/392 EWG)

Product leaflet 414 L


Pneumatic Plier Type 110/16-414 L

Staples Type 110 and type 380*



BeA Deutschland
Befestigungstechnik
P.O.Box 14 80
D-22904 Ahrensburg
Phone: +49 (0) 4102 78-0
Fax: +49 (0)4102 78-250
www.bea-group.com
e-mail: info@bea-group.com

a division of
Joh. Friedrich Behrens AG

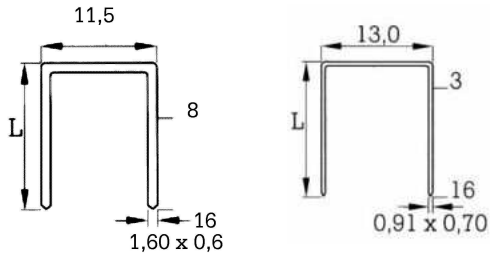

Description	L = Length mm
110/12 VK	12
110/14 VK	14
110/16 VK	16

380/08 NK	8
380/10 NK	10
380/12 NK	12
380/14 NK	14
380/16 NKS	16

Other lengths and finishes are also available on request.

* Modified tool available for staple type 380

Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	MS = brass	RF = rust resistant, material 1.4301	SA = step cut