

Pneumatic Stapler Type 14/50-800

The BeA 14/50-800 is a tool with very high driving power. Uses staples type 14 and type 16 (155) in lengths from 25 – 50 mm. By using the most up to date materials technology, has the tool weight been reduced for operator comfort. This, coupled with the latest development of pneumatic design, gives the 14/50-800 exceptional driving power even into hard timber. The magazine swivel cover allows fast reloading of staples.



Popular applications:

Supporting structures made of wood, pre-fabricated houses, boxes, cases, crates, pallets, chair frames, cable reels.

Length: 334 mm
Width: 93 mm
Height: 290 mm

Technical data

Type description:	14/50-800	14/50-800 G
Article code:	12000262	12000265
Magazine type :	Top loader	Top loader
Safety:	Contact actuation	Single actuation
Fastener type:	Type 14 and Type 155	Type 14 and Type 155
Magazine capacity:	173 x Type 14, 160 x Type 155	173 x Type 14, 160 x Type 155
Fasteners per strip:	2 x 75 Type 14, 2 x 70 Type 155	2 x 75 Type 14, 2 x 70 Type 155
Operating pressure:	5 – 8 bar	5 – 8 bar
Max. operating pressure:	8 bar	8 bar
Air consumption/operation:	2.2 litre / 6 bar	2.2 litre / 6 bar
Inner hose diameter:	Ø 9 mm LW recommended	Ø 9 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d= 81 dB	L pA, 1s, d= 81 dB
Single-shot emission sound pressure level:	L WA, 1 s,d= 91 dB	L WA, 1 s,d= 91 dB
Weight:	2.9 kg	2.9 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is 3.6 m/s²

Extras supplied with the nailer:

Operating instructions, spare parts list, service instructions, silencer.
For safety reasons we recommend the BeA single release if working at high pressure allows this.

Subject to technical modifications.

Accessories:

Articel code	Description
14404669	Balancer Eye
14403415	Remote valve
14403514	Mounting flange
14405156	Single actuation set

All BeA pneumatic tools can be jig-mounted
We supply the necessary accessories and equipments.



This tool conforms to the EG Directive
for Machinery (89/392 EWG)


Pneumatic Stapler Type 14/50-800



BeA Deutschland
Befestigungstechnik
P.O.Box 14 80
D-22904 Ahrensburg
Phone: (04102) 78-0
Fax: (04102) 78-250
www.bea-group.com
e-mail: info@bea-group.com

a division of
Joh. Friedrich Behrens AG

Staples Type 14 and Type 16 (155)

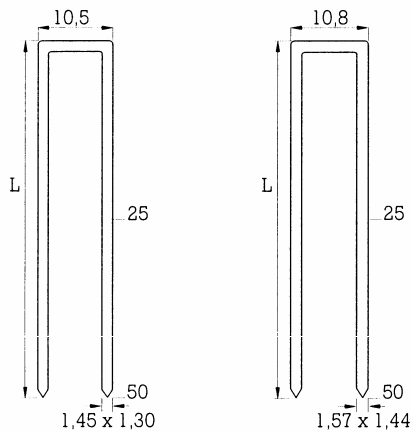

Description	L = Length mm
14/25 NK HZ	25
14/28 NK HZ	28
14/30 NK HZ	30
14/32 NK HZ	32
14/35 NK HZ*	35
14/38 NK HZ*	38
14/40 NK HZ*	40
14/45 NK HZ	45
14/50 NK HZ	50

16/25 NK HZ (155/25)	25
16/30 NK HZ (155/30)	30
16/32 NK HZ (155/32)	32
16/35 NK HZ (155/35)	35
16/38 NK HZ (155/38)	38
16/40 NK HZ (155/40)*	40
16/45 NK HZ (155/45) *	45
16/50 NK HZ (155/50) *	50

Staples type 155 are also available certified to DIN 1052 (VZ HZ + NR HZ)

* certified to DIN 18182

Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
VZ = heavy galvanized steel	MS = brass	RF = rust resistant, material 1.4301	SA = step cut