

Pneumatic Stapler Type 14/65-830C

The new BeA 14/65-830C is especially designed for strong, long-lasting fastening connections. The tool is fitted with a service friendly quick-release and is light and very fast. Uses staples type 14 and type 16 (155) in lengths from 40 - 65 mm. By using the most up to date materials technology, the tool weight has been reduced for operator comfort. This, coupled with the latest development of pneumatic design, gives the 14/65-830C exceptional driving power even into hard timber.



Popular applications:

Supporting structures made of wood, pre-fabricated houses, boxes, cases, crates, pallets, chair frames, cable reels.

Length: 370 mm
Width: 107 mm
Height: 328 mm

Technical data

Type description:	14/65-835C
Article code:	12000506
Magazine type :	Top loader
Safety:	Contact actuation
Fastener type:	Type 14 and Type 16 (155)
Magazine capacity:	168 x Type 14, 152 x Type 155
Fasteners per strip:	2 x 75 Type 14, 2 x 70 Type 155
Operating pressure:	6 - 8 bar
Max. operating pressure:	8 bar
Air consumption/operation:	2.2 litre / 6 bar
Inner hose diameter:	Ø 9 - 10 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d= 82 dB
Single-shot emission sound pressure level:	L WA, 1 s,d= 89 dB
Weight:	2.7 kg

The vibration as per ISO 8662-11 is 3.2 m/s².

Extras supplied with the stapler: Operating instructions, spare parts list, service instructions, silencer. For safety reasons we recommend the BeA single release if working pressure allows this.

Subject to technical modifications.

Accessories:

Article code	Description

All BeA pneumatic tools can be jig-mounted
We supply the necessary accessories and equipments.




This tool conforms to the EG Directive
for Machinery (98/37 EC)

Pneumatic Stapler Type 14/65-830C



Joh. Friedrich Behrens AG
P.O.Box 14 80
D-22904 Ahrensburg
Phone: +49 (0) 4102 78-0
Fax: +49 (0) 4102] 78-250
www.bea-group.com
e-mail: info@bea-group.com

Staples Type 14 and Type 16 (155)

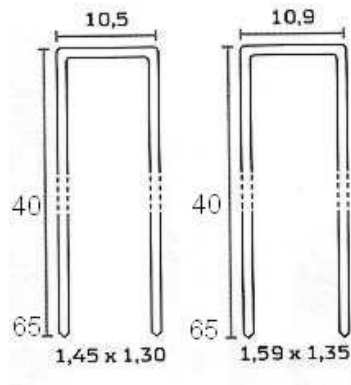

Description	L = Length mm
14/40 NK HZ*	40
14/45 NK HZ	45
14/50 NK HZ	50
16/40 NK HZ (155/40)*	40
16/45 NK HZ (155/45)*	45
16/50 NK HZ (155/50)*	50
16/60 NK HZ (155/60)*	60
16/65 NK HZ (155/65)*	65
155/45 NR HZ	45
155/45 VZ HZ	45
155/50 VZ HZ	50
155/56 VZ HZ	56
155/65 VZ HZ	65

Staples type 155 (VZ HZ + NR HZ) are certified to DIN 1052

* certified to DIN 18182

Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	MS = brass	RF = rust resistant, material 1.4301	SA = step cut