

New!

BeA

Pneumatic- Carton Closing Tool Stick Magazine Series “AT”

One of the main selling points of the carton closing tools series “AT” is easy handling and fast cycling to set the staples.

Latest magazine technology enables quick loading.

The series AT uses staples with two leg lengths in one tool. All types equipped with a muffler.

Fastening applications :


All kinds of carton packaging...


Technical Data:

| | |
|--|------------------------------|
| Type description: | Series “AT” |
| Article code: | reverse side |
| Staple type: | reverse side |
| Magazine type: | rear loader |
| Magazine capacity: | 100 / 120 |
| Mode of operation, standard: | single fire |
| Weight, kg: | 2,44 |
| Dimension L/W/H, mm: | 415 / 115 / 220 |
| Staples per strip: | 50 |
| Operating pressure, bar: | 5-7 |
| Max. operating pressure, bar: | 7 |
| Air consumption per stroke at 6 bar: | 1,0 Litre |
| Inner hose diam. recomm.,mm: | 9-10 |
| Single-shot emission sound pressure level: L _{WA, 1s, d} | 93 |
| Emission sound pressure level at the workst.: L _{pA, 1s, d} | 89 |
| Vibrations: m/s ² | Lower than declaration limit |

Specification:

operating instructions, service instructions, spare parts list, service oil, staple remover, hanger, allen wrenches 2,5mm, 3mm, 4mm, 6mm.

 This tool conforms to the EG directive for machinery (89/392 EWG).

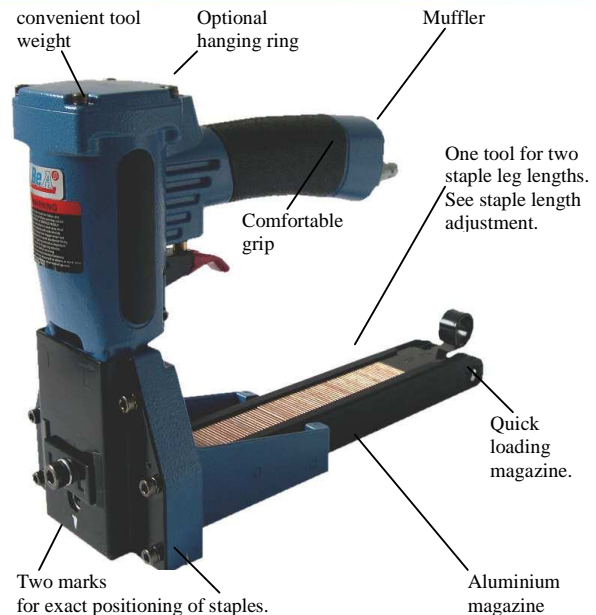

Tool features and benefits:

Quick, accurate setting of staples

Better quality of finished work

Optimal handling


Decreases operator fatigue and increases working efficiency

Muffler inside

Better working conditions

Durable and reliable tool design

Best tool for the investment




*Staple length adjustment:

1. Loosen screw below front plate with allen wrench
2. Length adjustment with regulating screw
Carton closing tool for lengths 15/18mm:
S(top)=15mm, L(top)=18mm
Carton closing tool for lengths 18/ 22mm:
S(top)=18mm, L(top)=22mm
3. Tighten screw below front plate



*Adjust shape of applied staple:

Direction T=to the left; L=to the right



*Penetration into carton material:

Remove allen screw and press the whole front plate up / down.



Unigraf

ROZA-GRAPISA

WWW.ROZAGRAPISA.COM

San Vicente Mártir, 20 28043 MADRID Tl +34 914166614 Fax +34 915193075
Ana María, 47 33209 GIJON Tl +34 985162833 Fax +34 985146622



| Tool-Types: | | | | Fasteners: | | | | | | |
|-------------|----------------------------------|----------------------------|---------------------------------|------------|---------------------------------|----------------------------|---------------------------|--------------------------|---------------------------|----------------------------|
| | BeA- Article- Description: | BeA Article- Number: | Magazine- Capacity Piece: | | BeA Article- Description: | BeA Article- Number: | Length, mm, (inch): | Crown, mm, (inch): | Wire-Ø mm, (inch) | Compare- able- with: |
| | AT-A18 | 12100282 | 100 | | A (Packfix) | 10000775 | 15 (5/8") | 34,7 | 2,3 x 0,9 (.090x.035") | ISM, Atro, Kilberg |
| | | | | | A (Packfix) | 10000776 | 18 (3/4") | 34,7 | 2,3 x 0,9 (.090x.035") | ISM, Atro, Kilberg |
| | AT-A22 | 12100283 | 100 | | A (Packfix) | 10000776 | 18 (3/4") | 34,7 | 2,3 x 0,9 (.090x.035") | |
| | | | | | A (Packfix) | 10001920 | 22 (7/8") | 34,7 | 2,3 x 0,9 (.090x.035") | |
| | AT-C18 | 12100285 | 120 | | C (Clincher) | 10000778 | 15 (5/8") | 32,0 (1 1/4") | 1,9 x 0,9 (.076x.035") | ISM |
| | | | | | C (Clincher) | 10000779 | 18 (3/4") | 32,0 (1 1/4") | 1,9 x 0,9 (.076x.035") | ISM |

| | | | Carton: | | Pallet | |
|---------------------|---------------------|-------------------------|---------|------|--------|----|
| Article-Description | Article.- Number | List-Price € / Mille | Mille | kg | Mille | kg |
| Tool-Types: | | | | | | |
| AT-A18 | 12100282 | | | 3,0 | | |
| AT-A22 | 12100283 | | | 3,0 | | |
| AT-C18 | 12100285 | | | 3,0 | | |
| | | | | | | |
| Fasteners: | | | | | | |
| A (Packfix 5/8") | 10000775 | | 20 | 18,0 | | |
| A (Packfix ¾") | 10000776 | | 20 | 20,0 | | |
| A (Packfix 7/8") | 10001920 | | 16 | 17,4 | | |
| C (Clincher 5/8") | 10000778 | | 20 | 19,0 | | |
| C (Clincher ¾") | 10000779 | | 20 | 20,8 | | |
| | | | | | | |